


BUILDING ALT 37 & FLUX45 INTO A HOUSING

VENTILATION

The heat from the base module exits through its bottom plate. To prevent overheating when built into a housing you must cool the bottom plate. Make sure there is some air space under the base by lifting the module a bit up, so some air can escape.

HIDING THE UNIT

The base can be covered with anything that isn't magnetic. So wood or aluminum is possible. However, there needs to be a hole in the center of the unit for the optical sensor. Our systems use an optical sensor on the base and a reflector on the floating carrier. This path must be unobstructed for the levitation unit to function.

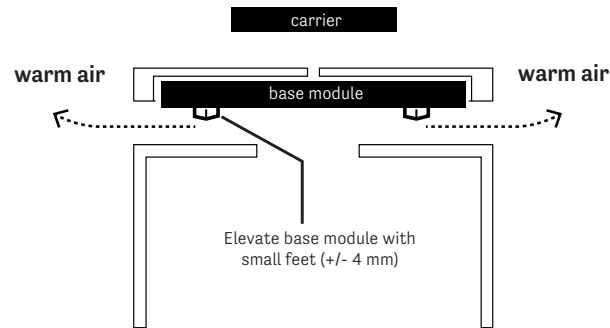

THE IMPORTANT THINGS

Try not to stretch the limits of the module in terms of a too heavy object, or too high. (this will create heat.)

Make sure there is active ventilation.

Make sure the airflow is bottom to top.

Make sure the hot air and cool air don't mix.

ADDING COVER

When adding a transparent cover make sure to leave the 2 mm gap open. (carrier doesn't need cooling)

EXAMPLE

